

D

Wandhaltersysteme

Gem. DIN EN 14396

Für verschiedene Einbausituationen von ortsfesten Leitern.

Mindestens alle 1,96 m ein Paar Wandhalter.

GB

Wall bracket systems

complying with DIN EN 14396

For a range of installation situations for stationary ladders.

One pair of wall brackets at least every 1.96 m

F

Système de fixation murale

Selon DIN EN 14396


Convient à diverses situations de montage d'échelles fixes.

Une paire de fixations murales au moins tous les 1,96 m.


***Zuganker-Set**
bitte separat bestellen
Bei Wandabstand > 330 mm

***Please order**
tie rod set separately
If wall distance > 330 mm


***kit tirants à commander**
séparément
Si distance murale > 330 mm

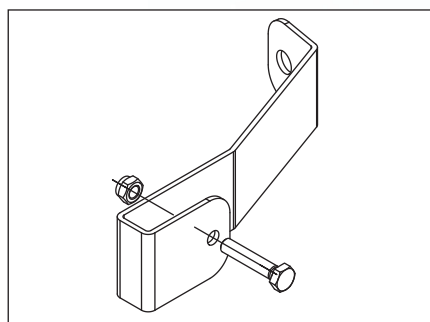






Standard 150 mm

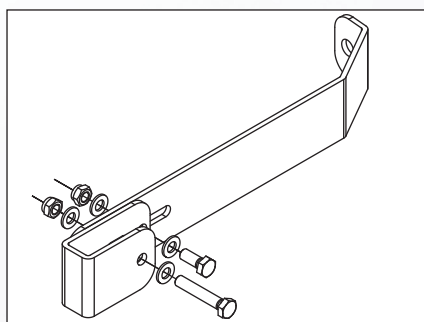

150 - 330 mm

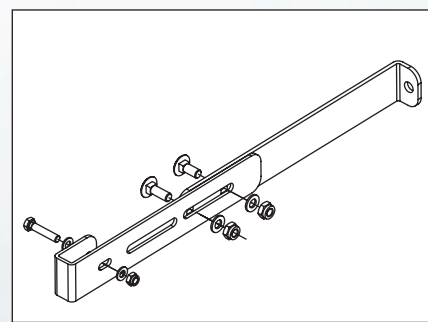

330 - 610 mm



** besondere Belastung

Ausführung Design Construction	Wandhalter mm Wall bracket mm Fixations murales mm	40 x 20 mm Holmprofil Rechteck Rail profile, rsquare Profil de montant rectangulaire 1.4571/ASTM 316 ti	40 x 20 mm Holmprofil Rechteck Rail profile, rsquare Profil de montant rectangulaire 1.4301/ASTM 304	40 x 20 mm Holmprofil Rechteck Rail profile, rsquare Profil de montant rectangulaire 1.0037/ASTM A36	38 x 2 mm Holmprofil Rail profile Profil de montant 1.4571/ASTM 316 ti	60 x 24 mm Holmprofil Rail profile Profil de montant 1.4571/ASTM 316 ti
Für Rundschaft und gerade Wand For round shafts and straight walls Pour regards ronds et parois droites	150	9696-10	9696-50	9696-40	9696-27	X
	165**	9644-01	X	9645-00	X	X
	150-180	9696-08	9696-51	X	9696-20	9696-00
	150-300	9696-16	9696-57	X	X	X
	200	X	X	X	9696-26	X
	180-250	9696-11	9696-52	9696-41	9696-21	9696-01
	250-310	9696-12	9696-53	9696-42	9696-22	9696-02
	330-410	9696-13	9696-54	9696-43	9696-23	9696-03
	430-510	9696-14	9696-55	X	9696-24	9696-04
	530-610	9696-15	9696-56	X	9696-25	9696-05
*Zuganker Set *tie rod set *kit tirants		9696-28	9696-58	9696-48	9696-28	9696-28